

Warner Media - XOS - Quick Start Guide

Contacting Harmonic:
WM-CBAND-HELP@harmonicinc.com

1. Unpacking and Racking

A. Please use this list to ensure that your order is complete.

Quantity	Description
1	XOS Server - 1U HPE DL360 G10
2	Power cable
8	Micro BNC to BNC cable
1	Front bezel
1	Rack mounting kit for 1U HPE DL360 G10
1	USB to Ethernet adapter
1	Quick Start Guide

B. Remove the XOS and associated accessories from the box.


C. Mount the XOS in the rack.

The XOS can be mounted in a 19" rack.

- Ensure that it is secured in the rack.
- Maintain air flow around the XOS.
- Do not place another device directly on the top of the XOS.

2. Cabling


A. Follow the diagram below to perform the XOS cabling.

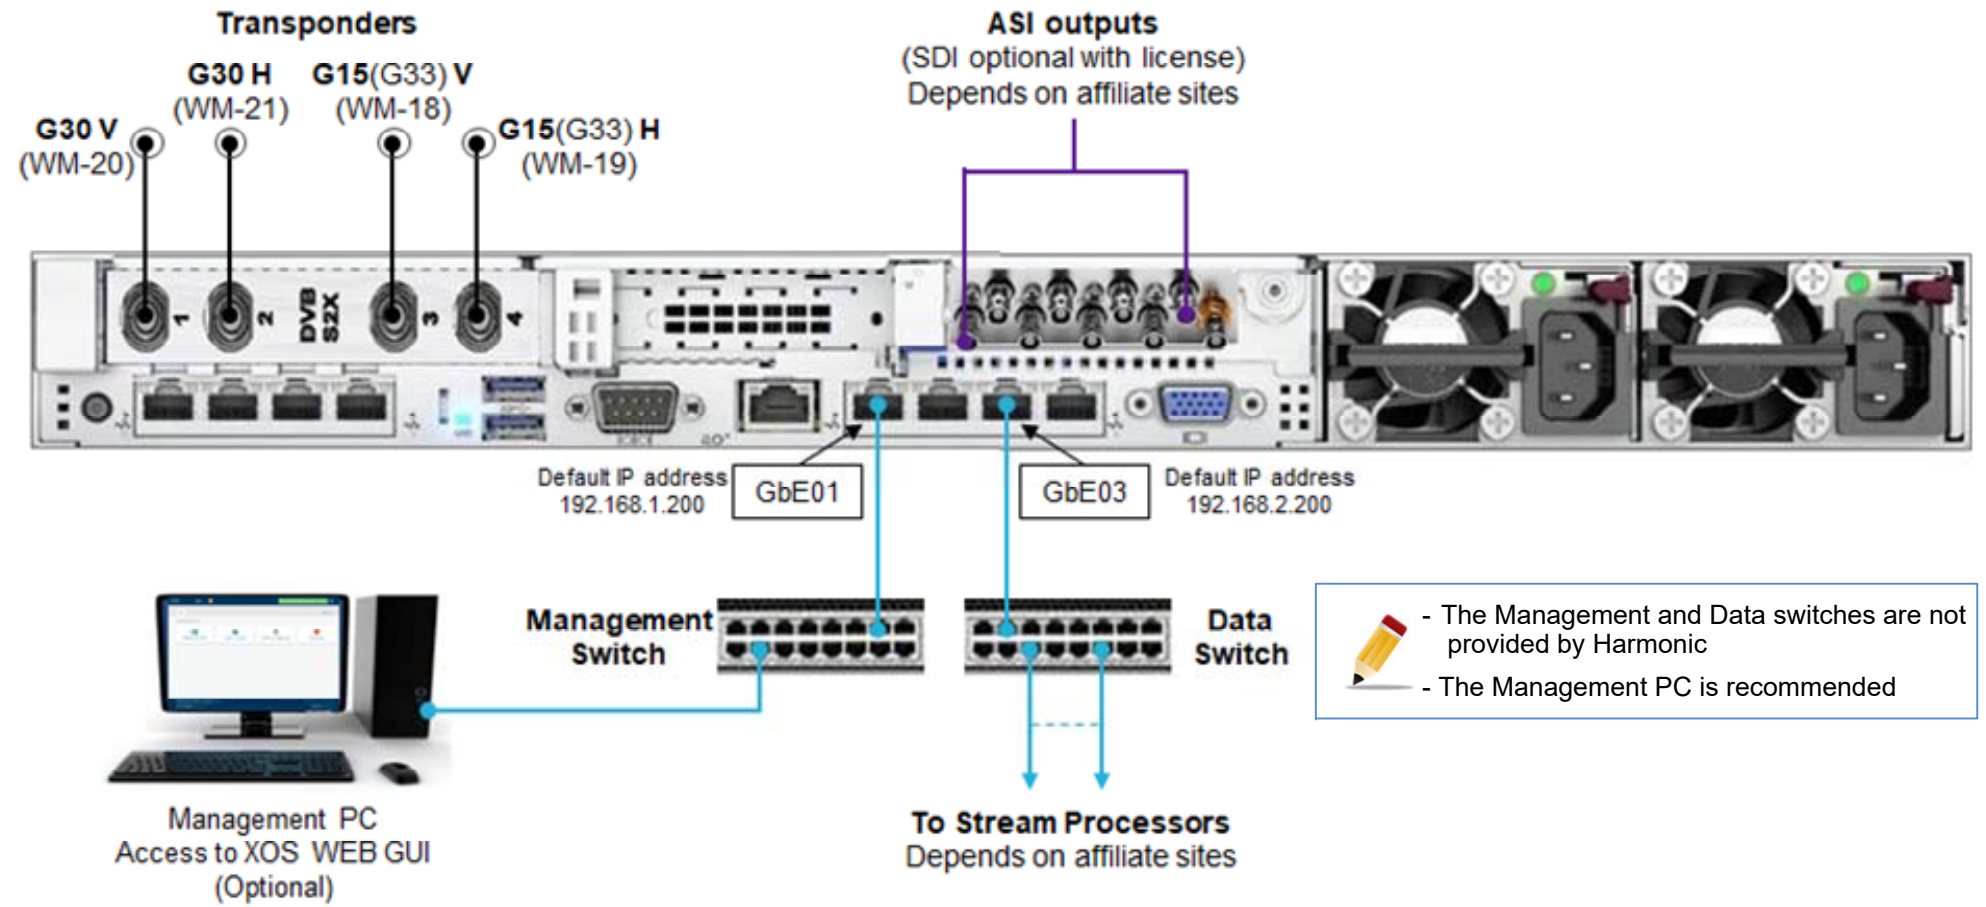

- The Management and Data switches are not provided by Harmonic
- The Management PC is recommended

3. Configure IP addresses

A. Use the USB to Ethernet adapter to connect a laptop to the USB port on the front panel as shown below:

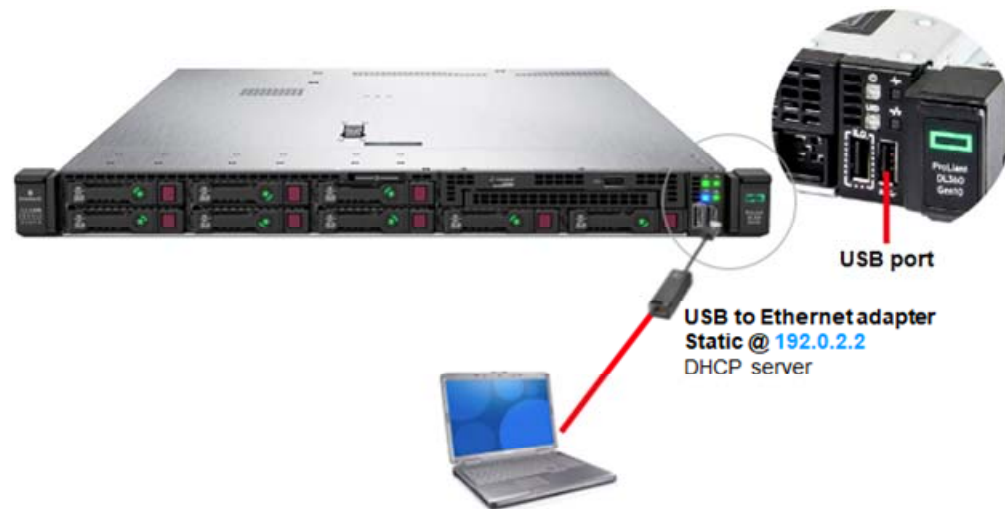

B. Power on the XOS.

- Connect the power cord to the power supply on the rear panel.
- Connect the cable to the power source and turn on the power.
- Wait for the XOS to complete the boot process.

C. Power on the Laptop.

- In a web browser (Google Chrome), type the IP address (<https://192.0.2.2>) and press Enter.

D. Enter the following credentials and click Log in:

- Login: **XOS**
- Password: **XOS-user**

E. Select the Platform Configuration tile and click Launch.

F. Select the Network tab followed by the IP config tab.

G. You can change the IP parameters for the following ports based on your IP plan or keep the default IP addresses:

- Management 01 port (GbE01 – Default: 192.168.1.200)
- Data GbE03 port (Default: 192.168.2.200)


H. Click Save.

I. Remove the USB-Ethernet adapter from the front panel of the XOS.

J. Install the front bezel.





If you don't have a Management PC, keep the laptop connected until you complete the configuration (Step 6).

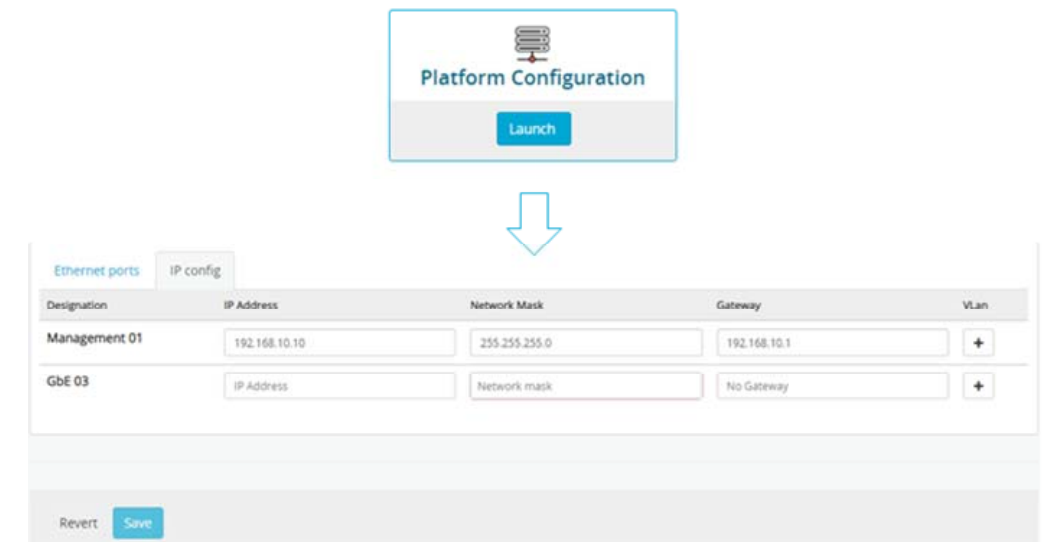

4. Checking the RF connection

Depending on the RF connection and the **Distribution Management System (DMS)** configuration, either a **Connected** or a **Controlled** message will appear at the top of the user interface:



5. Waiting for Upgrade & Configuration

The XOS will perform a software and configuration update upon a successful connection to RF. This process is automatic and controlled by the DMS at Warner Media.



Once the software and configuration updates complete, do the following:

A. Select the Configure Broadcast tile and click Launch.


The display will be similar to the picture on the right:

- The message at the top of the user interface (UI) specifies DMS is controlling the XOS.

- The left side of the UI shows the RF tuners and the number of associated programs.

- The right side of the UI shows the Multiplexers associated to each tuner.


B. Click on a multiplexer to expand the display for the list of authorized programs.

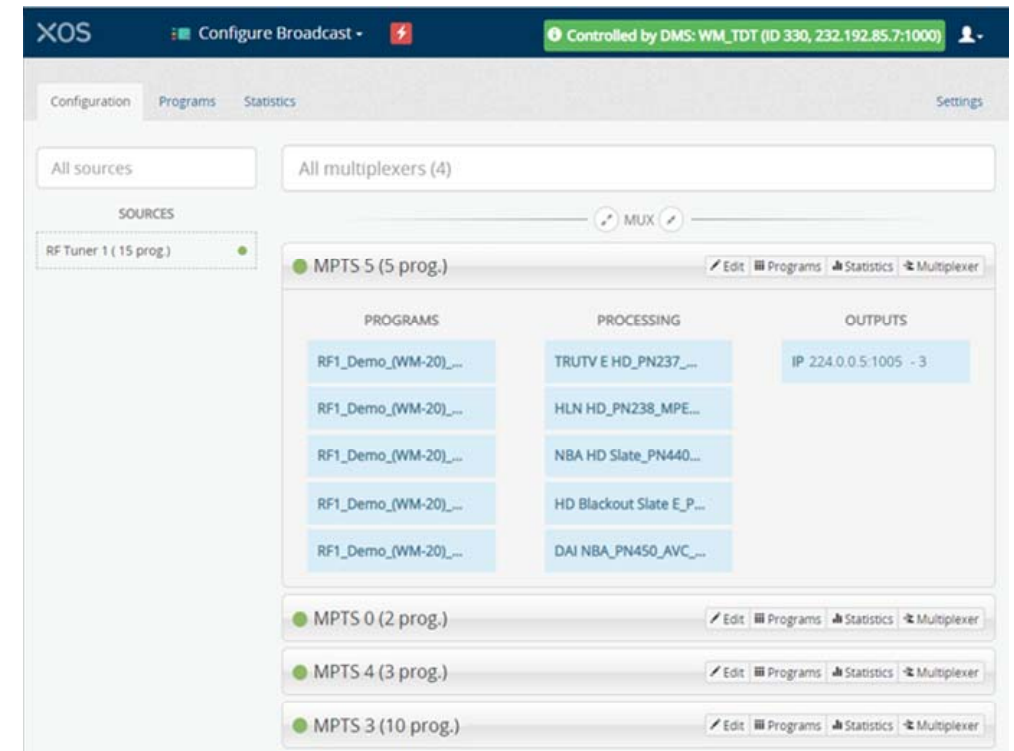

6. Final steps for configuration

A. Assign a Multiplexer to an IP output.

1 - Select a Multiplexer and click **Edit**.

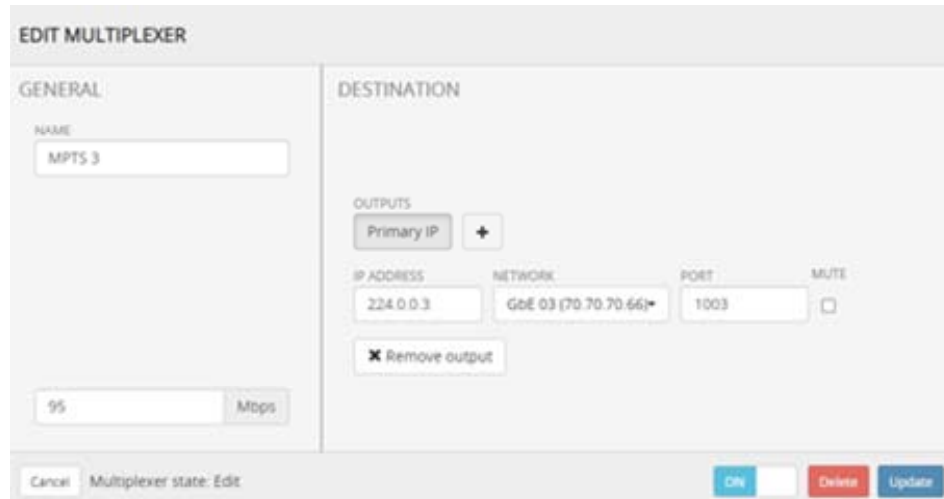

2 - Set the multicast IP Address according to your IP plan.

3 - Select the IP data port (typically GbE03).

4 - Set the UDP port number according to your IP plan.

5 - By default, the Primary IP output is muted. Clear the check box to unmute the output.


6 - Click **Update** to commit your changes.

B. If required, assign a Multiplexer to an ASI output.

1 - Select a Multiplexer and click **Edit**.

2 - Click **+** button.

3 - Select ASI.

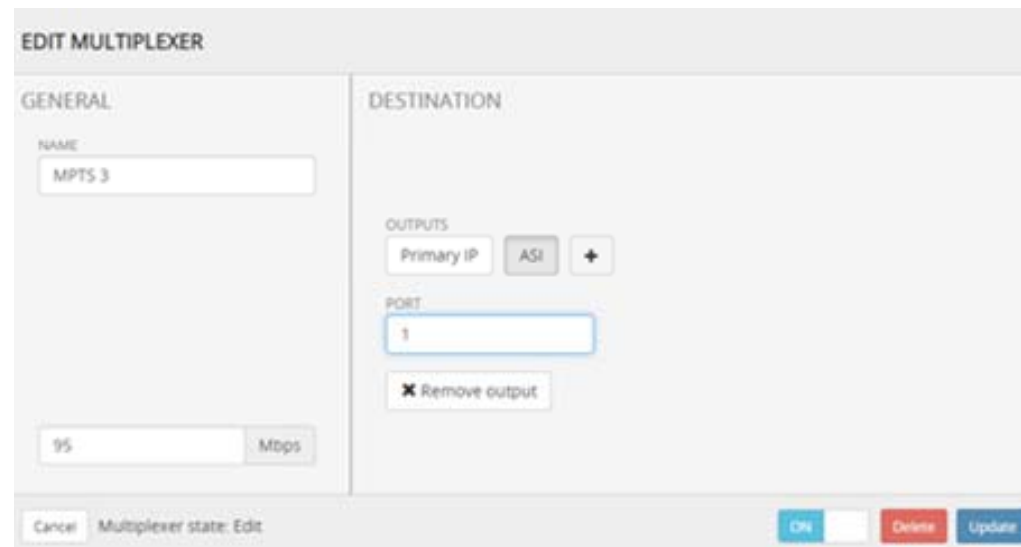

4 - Enter the ASI port to be used.


5 - Click **Update** to commit your changes.

7. Checking XOS outputs

A. Connect a professional-grade decoder to the XOS.

B. Connect the decoder to the HDMI port on the TV.

C. Power on the decoder and the TV.

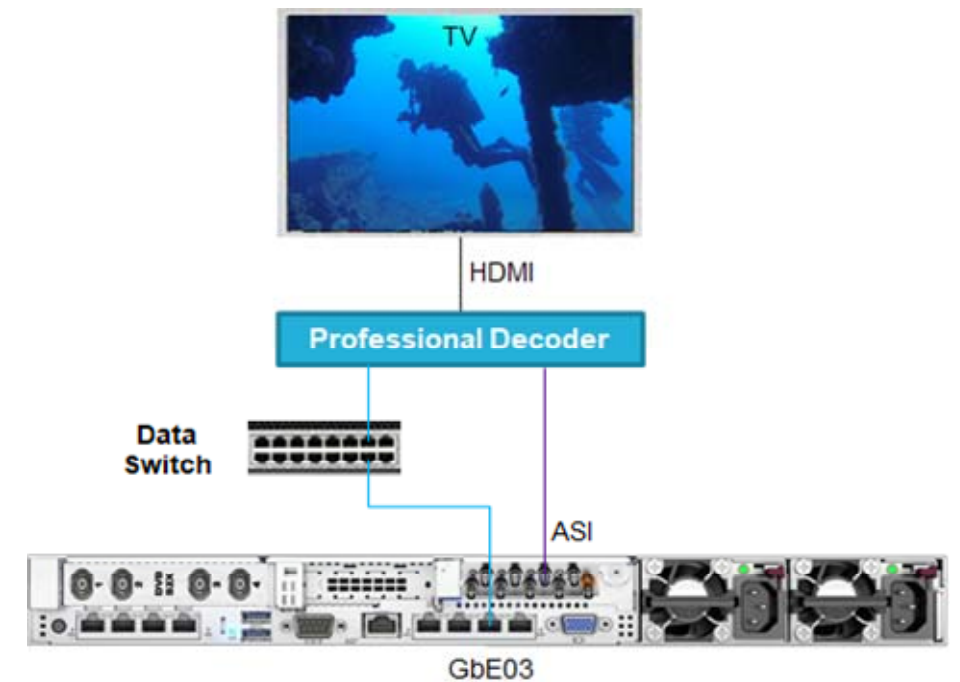

- The presence of a Multiplexer from the ASI input is automatically detected by the decoder.

- The first program appears,

- To receive a Multiplexer via the data switch, enter the same IP address you entered in the XOS (See to Step 6. A. Assign a Multiplexer to an IP output). Refer to the decoder documentation for additional information.

8. Documentation

The full user guide and other documentation are available at:
<https://harmonicinc.com/documentation/warner-media/>