

# ProStream X

VIDEO STREAM PROCESSOR & GATEWAY



## The Harmonic ProStream® X video stream processor and gateway leverages advances in IT infrastructure to provide best-in-class, high-performance stream processing for mission-critical broadcast, cable, satellite, IPTV and OTT delivery applications.

As the successor to the market-leading ProStream 9100 stream processor, the software-based ProStream X system allows users to leverage the versatility and agility of software-based infrastructure. The platform integrates 10-Gbps throughput with a variety of advanced video processing applications, including multiplexing, splicing, blackout switching and DVB CSA3 encryption. ProStream X also serves as a high-throughput video gateway featuring socket address flipping and ASI-to-IP conversion.

ProStream X runs on a 1-RU COTS Intel® server and pairs with the Harmonic Electra™ X2 advanced media processor to deliver a compact solution for encoding and distributing superior-quality IP and ASI video streams. This high-density architecture reduces the amount of rack space required to meet fluctuating stream processing requirements, helping operators reduce CAPEX and OPEX. High reliability and simplified serviceability result in an all-in-one-box experience for high-throughput stream processing at low TCO.

SD, HD and UHD formats, and MPEG-2, MPEG-4 AVC and HEVC codecs are all supported on ProStream X. A software-only version, ProStream XVM, is available for environments featuring the Electra XVM virtualized media processor.

### Business Benefits

#### Scrambling

ProStream X integrates with major conditional access systems (CAS) and is the first stream processor to offer 128-bit DVB CSA3 encryption support, integrated and certified by Cisco and Irdeto, making it the most secure stream processing solution for distributing UHD broadcast services. DVB CSA2, AES and BISS fixed key scrambling are also supported, as well as trick mode for video on demand.

ProStream scrambling technology is known in the industry for its stability and high performance. The ProStream X platform can scramble any format of video, audio and data elementary stream (e.g., MPEG-2, MPEG-4 AVC, HEVC, AC-3, AAC, HE-AAC), as well as multiplex MPEG TS. The solution easily integrates into existing architectures, and reduces cost and complexity by eliminating the need for multiple devices in distributed cable, satellite or telecom networks.

#### Statistical Multiplexing

Harmonic's DiviTrackIP™ option integrates statistical multiplexing and IP switching by connecting ProStream X systems with remote Harmonic Electra X2 encoders across a LAN or WAN, allowing any ProStream X in the network to efficiently manage the encoders' statmux pools. ProStream X also supports regional statmux capability for the terrestrial market, allowing a single encoding instance to be part of multiple DiviTrack IP pools. This capability answers the need to encode and generate regionalized TS's with both common (shared) national and unique regional channels. The use of the regional statmux feature reduces the number of encoders required to support regionalized feeds and eliminates unnecessary national common program duplication.

### HIGHLIGHTS

- Multiplexing and scrambling of up to 2,000 simultaneous broadcast services
- High-throughput 10-Gbps video gateway
- Advanced multiplexing of any service from any input to any output
- Target Average Bitrate
- DataTrack
- IP networking and mirroring
- DiviTrack IP statistical multiplexing with remote distributed encoders
- Live-to-live splicing for MPEG-2, MPEG-4 AVC and HEVC video streams
- DVB CSA3, DVB CSA2 and AES scrambling
- Slate insertion for service disruption messages
- Emergency Alert System (EAS) compliance including SCTE-18 Trigger

In addition, ProStream X enhances statmux with DataTrack capability, which allows non-video PIDs (e.g: audio, ancillary data, teletext, subtitles) into the stat-mux pool. When not in use, the ProStream X stat-mux mechanism, frees up the bandwidth provisioned for these PIDs, allowing it to be reallocated to video to improve video quality. The DataTrack capability is valid also in CBR systems where no advanced allocation is required anymore for these occasional PIDs without risking of an overflow.

ProStream statmux also includes a unique Target Average Bitrate application, which provides the ability to apply the long-term average bitrate for each video based on the user configured bitrate. For operators that have multiple customers sharing channels in the same stat-mux pool, the feature will secure the average bitrate customers are paying for, over the long term, while maintaining high video quality.

**Splicing**

ProStream X supports live-to-live splicing, which allows ProStream X to switch between main and alternative live feeds seamlessly, with no ETR 290 errors at output. In statmux applications that include switchover to an alternate program, the alternate program becomes part of the statmux VBR pool.

**Digital Turnaround**

With standard IP and DVB input and output interfaces, the ProStream X processor is easily incorporated into existing headend environments and supports multiple digital turnaround applications. The platform’s robust, extensible and highly scalable design supports MPEG remultiplexing, including PID remapping, prioritizing and filtering, insertion and generation of PSI/SI tables, and PID multicast. Device, port and Input TS redundancy are supported, as well as multiple IP sockets for MPTS and SPTS applications. The compact platform not only reduces rack space and power requirements, but also simplifies network infrastructure while delivering a high-availability solution.

**“Pay As You Grow” Scalability**

As processing needs evolve, the ProStream X platform makes it easy to incrementally add or upgrade I/O modules and firmware licenses, simplifying scalability and extending the system’s value.

**Technical Benefits**

**High-Throughput Video Processing**

ProStream X offers the choice of quad 1-GbE, dual 10-GbE or ASI I/O. The high-throughput 10-GbE option supports up to 1,000 transport streams and 2,000 simultaneous multiplexing and scrambling services. Video gateway capabilities include socket address flipping, ASI-to-IP conversion and IP mirroring. The dual 10-GbE interfaces also reduce the number of required router ports and enable a simplified IP addressing scheme.

**High Reliability, Simplified Serviceability**

Maintenance on the ProStream X platform is simplified with hot-swappable fan assemblies and dual redundant power supplies. Changing of processors and I/O modules is quick and easy. These thoughtful serviceability features improve system reliability and reduce the chance for down time, increasing the opportunity to generate revenue.


**Control and Management**

Processing on the ProStream X is easily configured and controlled with Harmonic’s NMXTM Digital Service Manager video management system, a service-oriented solution for mass configuring, monitoring and automated redundancy in centralized or distributed architectures. An intuitive and user-friendly web-based GUI is also available.

**World-Class Service and Support**

Harmonic stands behind the ProStream X system with comprehensive service and support programs, including system design, service deployment, technical support and network maintenance. World-class service plans and a global network of flexible and responsive support professionals help ensure your ability to deliver outstanding “anytime, anywhere, any-device” customer experiences.

**ProStream X: The Heart of the Headend**

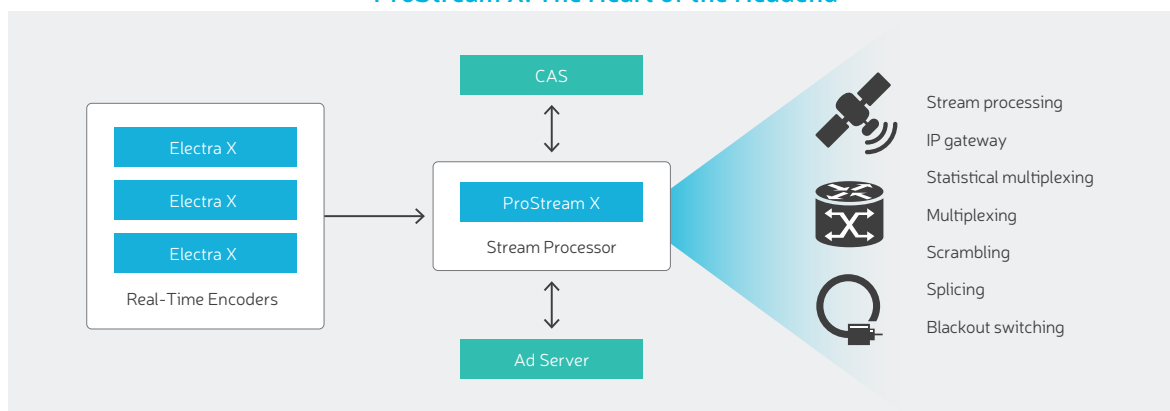

## SPECIFICATIONS

### 10-GbE IP I/O

Type	IEEE 802.3z
IP Ports	Four independent
Connectors	Four 1-GbE ports, RJ45 on board PCI option card for two 10-GbE ports SFP (up to two cards per platform) Support for IEEE 802.Q VLAN tagging
I/O Speed	Up to 10 Gbps
IP Encapsulation	MPEG TS over UDP/IP/MAC 1 to 7 TS/IP
MPEG Format	188 B per TS
MPEG Transport Streams	MPTS and SPTS
I/O Processing	1,000 sockets Up to 10 Gb per platform (configuration dependent)
Maximum Bitrate per Socket	300 Mbps
Addressing	Multicast
Management	IGMPv2/v3

### ASI I/O

Type	ASI input/output
ASI Ports	Eight ports per card, up to two cards per platform
Connectors	Eight mini-DIN ports
I/O Direction	Configurable, input or output, per port
MPEG Format	188/204 B per TS
I/O Processing	One MPTS/SPTS per port Up to 213 Mbps per input or output

### MANAGEMENT INTERFACES

Ethernet	1000Base-TX
Connectors	Two RJ45 (1 management, 1 CAS)

### SCRAMBLING

SCS	Internal
Standards	DVB common scrambling Open CAS DVB CSA2, DVB CSA3, AES-CBC, AES-NSA2 scrambling AES descrambling Fix Key scrambling and descrambling
CAS connections	Simultaneous connections to 30 different CA systems
BISS Encryption	Mode 1
Number of ECMs	2,000 ECMs per platform

### STATMUX CONTROL

Codecs Supported	MPEG-2, MPEG-4 AVC, HEVC
Formats Supported	SD, HD, UHD, interlaced, progressive
Frame Rates Supported	PAL, NTSC

### REMULTIPLEXING

Routing	Any input to any output
PID	Remapping, filtering, multicasting
PID Multicasting	Any input PID can be multicasted to multiple TS outputs with different remapping and processing (different CW, if scrambled)
PSI/SI	Extraction, injection, spooling, regeneration
Output Mirroring	Any to any
Advanced Stream Processing	Live-to-live splicing, PID range

### REDUNDANCY

Device	1:1 Under NMX or stand-alone GUI management
Internal	Any-to-any input TS TS output mirroring Port redundancy
Triggers	ETR 290

### SYSTEM MANAGEMENT

NMX™ Digital Service Manager 7.6.2 or later
Stand-alone web user interface

### PHYSICAL

Dimensions (W x H x D)	17.28 in x 1.7 in x 28 in (1 RU) 43.9 cm x 4.32 cm x 71.12 cm
Weight	28.7 lbs/13 kg

### POWER

Power Supplies	Dual redundant
Voltage	90-132 V 180-264 V
Line Frequency	47-63 Hz

### ENVIRONMENTAL

Cooling	Six fans, hot-swappable
<b>Operating Temperature</b> ASHRAE Class A2	+50° to +95° F +10° to +35° C Continuous operation with max rate of change: 10° C/hr Includes operation up to 40° C for up to 900 hrs/yr Includes operation up to 45° C for up to 90 hrs/yr
ASHRAE Class A3 ASHRAE Class A4	
Storage Temperature	-40° to +158° F -40° to +70° C
Safety Compliance	UL60950-CSA 60950 (USA/Canada) EN60950 (Europe) IEC60950 (International) CB Certificate & Report, IEC60950 CE-Low Voltage Directive 2006/95/EC (Europe)
Electromagnetic Compliance (Class A)	FCC /ICES-003 -Emissions (USA/Canada) Verification CISPR 22 - Emissions (International) CISPR 24 - Immunity (International) EN55022 - Emissions (Europe) EN55024 - Immunity (Europe) CE-EMC Directive 2004/108 EC (Europe) AS/NZS 3548 Emissions (Australia/New Zealand) BSMI CNS 13438 Emissions (Taiwan) KC Certification (Korea)

## ORDERING INFORMATION

### PLATFORM

Part Number	Description
PRM-X-21-AC-FF	ProStream X G2 stream processing platform with AC dual PSU
PRM-X-21-DC-FF	ProStream X G2 stream processing platform with DC dual PSU
PRM-X-DUAL-10GBE	ProStream X G2 stream processing platform with dual-port 10-Gbe optical NIC with SFP+
PRM-X-OCTO-ASI	ProStream X optional ASI card, with up to eight ASI I/O ports
FW-PRM-X-BASE	ProStream X base license
FW-PRM-X-LAB	ProStream X firmware license for lab license
FW-PRM-X-DEMO	ProStream X firmware license for all functions for 90-day demo usage; for none commercial use only
FW-PRM-X-SPARE	ProStream X cold spare firmware license for all ProStream functions; 30 days; one per chassis
FW-PRM-X-DEVICE-REDUNDANCY	ProStream X stand-alone device redundancy firmware license; one per chassis required

### MULTIPLEXING

Part Number	Description
FW-PRM-X-DT-POOL	ProStream X firmware license for statmux control; one DiviTrackIP license per pool
FW-PRM-X-SLATE-SRV	ProStream X firmware license for Slate Insertion; one per service required
FW-PRM-X-EAS-SRV	ProStream X firmware license for Emergency Alert System; one per service required
FW-PRM-X-FEC-TS	ProStream X FEC firmware license; one per transport stream required
FW-PRM-X-DT-REGIONAL-SRV	ProStream X firmware license for sharing common services between regional statmux pools; license is per one duplicate of the common services
FW-PRM-X-ESAM	ProStream X ESAM interface firmware license; one per service required
FW-PRM-X-DT-TARGET-BTR-SRV	ProStream X with Target Average bitrate algorithm; one per service required.
FW-PRM-X-DATATRACK	ProStream X capability to add external Data/Audio pids to the DiviTrack statmux pool.

### SCRAMBLING

Part Number	Description
FW-PRM-X-DVB-CSAv3-CW	ProStream X DVB CSA3 scrambling firmware license; one per service required
FW-PRM-X-DVB-CW	ProStream X DVB SCR firmware license; one per service required
FW-PRM-X-BISS-FIX-SRV	ProStream X BISS fixed key firmware license; one per service required
FW-PRM-X-AES-CW	ProStream X AES SCR firmware license; one per service required
FW-PRM-X-SCR-FIX-SRV	ProStream X fixed key firmware license; one per service required
FW-PRM-X-SELC-SCR	ProStream X Selective Encryption firmware license; one per service required
FW-PRM-X-SELC-EHP	ProStream X Encryption Hacking Prevention scrambling firmware license; one per service required
FW-PRM-X-DES-FIX-SRV	ProStream X AES Fixed key descrambling firmware license. One per service required

### HIGH THROUGHPUT

Part Number	Description
FW-PRM-X-2G-GATEWAY	ProStream X 2-Gbps throughput firmware license

### SPLICING

Part Number	Description
FW-PRM-X-SRV-SUB	ProStream X Splicing Service Substitution firmware license; one per service required